EXPO INOX

PLAST'IN

Français
English
2013

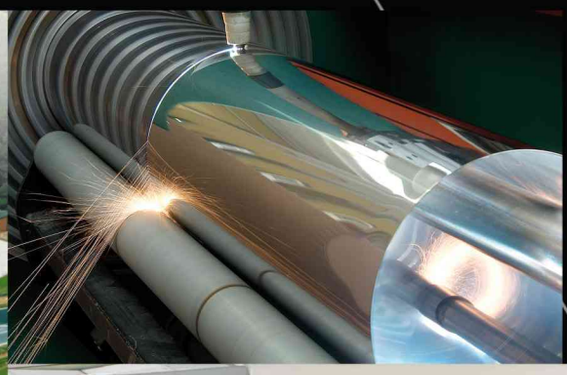

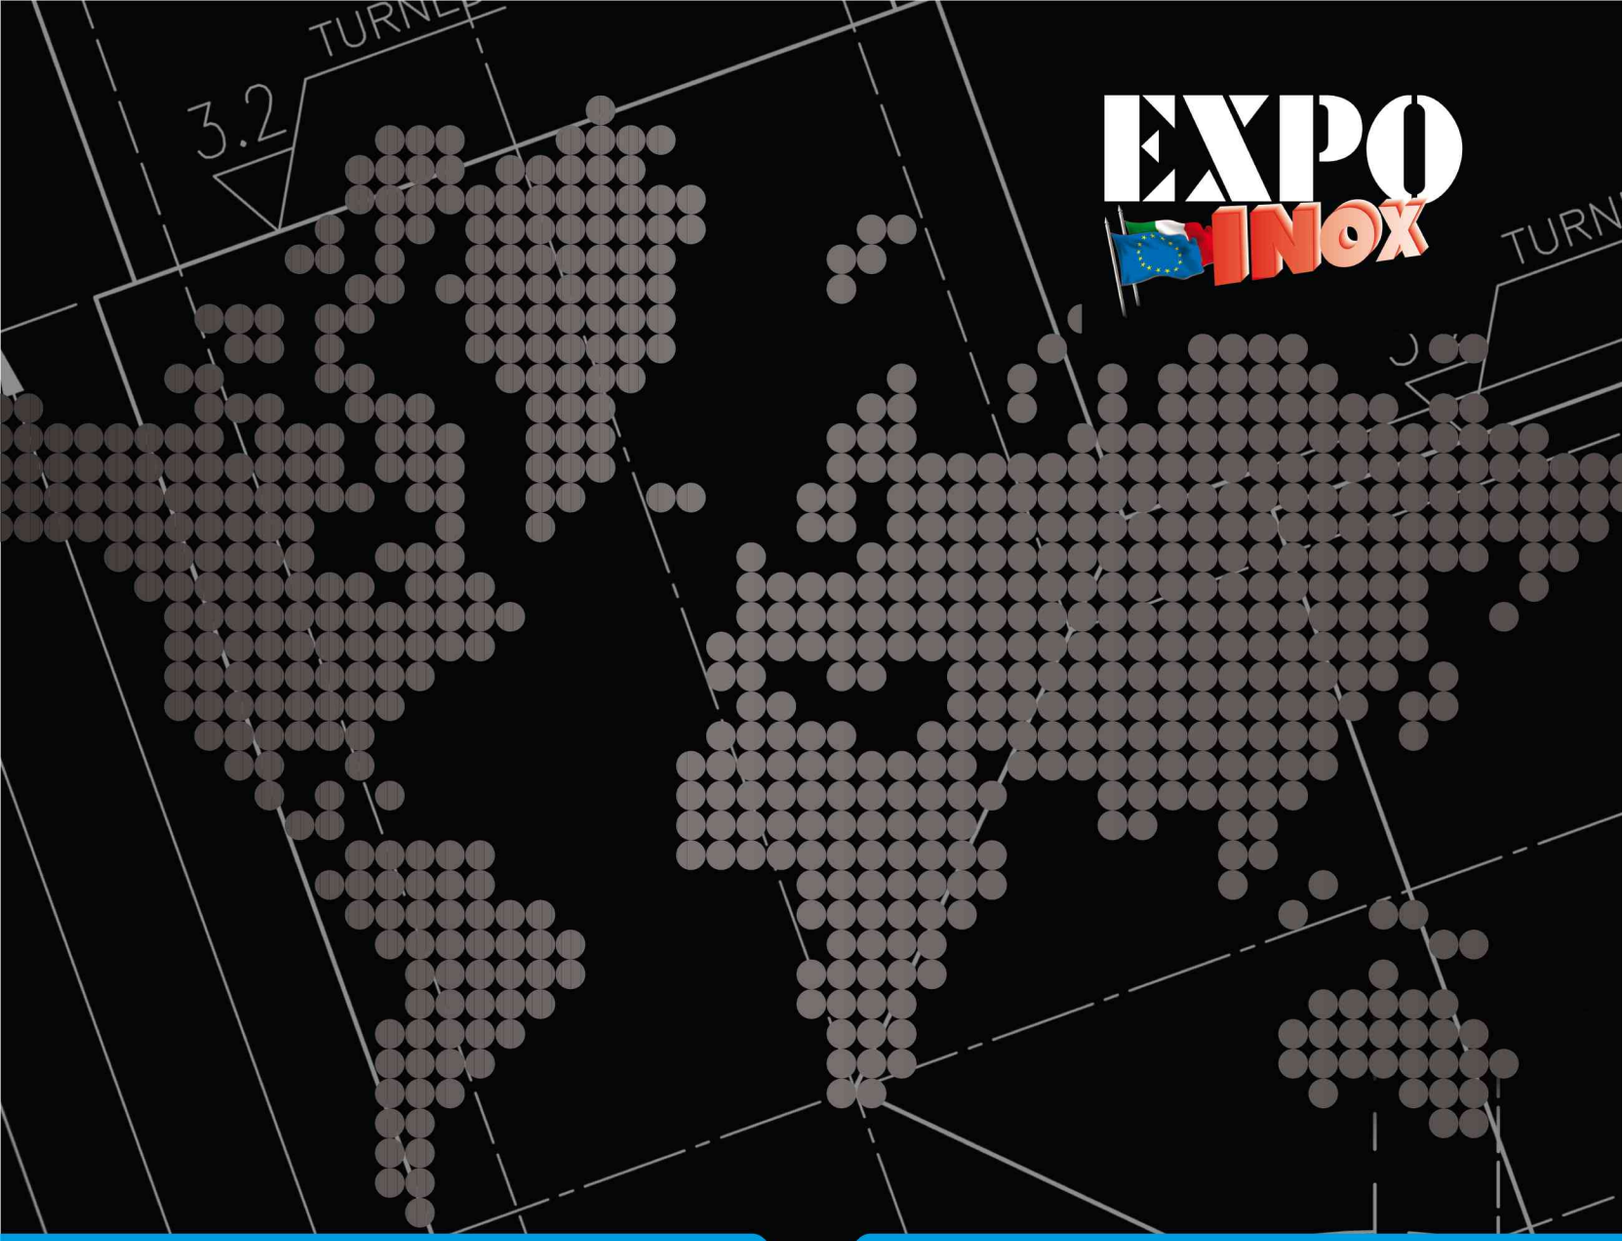

L'INOX DANS LE BÂTIMENT

EXPO INOX industrie leader dans la réalisation de produits en acier inox avec des solutions techniques et pour satisfaire les exigences des projeteurs et constructeurs. Le choix des matériaux de très haute qualité, l'activité continue de recherche et les investissements massifs qui sont la genèse de ces produits, sont la garantie que ces derniers répondent aux exigences les plus sévères d'aptitude aujourd'hui demandées par la plupart des organismes européens.

BUILDING WITH STAINLESS STEEL

EXPO INOX has been involved in stainless steel production for a long time. Every request is subjected to an accurate planning; the innovative techniques of our products, the multi purpose nature and long lasting characteristics of this material, enable us to propose advanced technical, aesthetical and design solutions of the highest quality. Stainless steel is ideal for linear and essential design creations, matching and respecting the environment in which it is placed. Design with stainless steel, give the customer the result he desires even to the most demanding requests: this is our main objective.

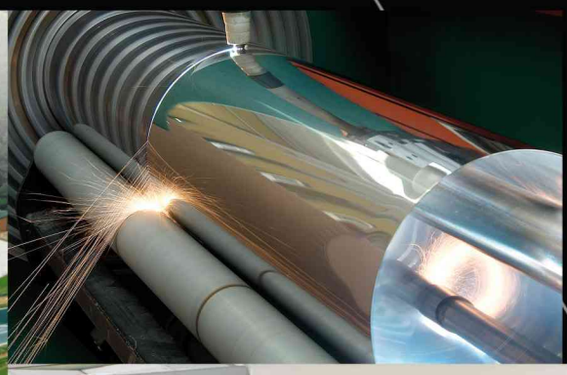

EXPO INOX

PLAST'IN

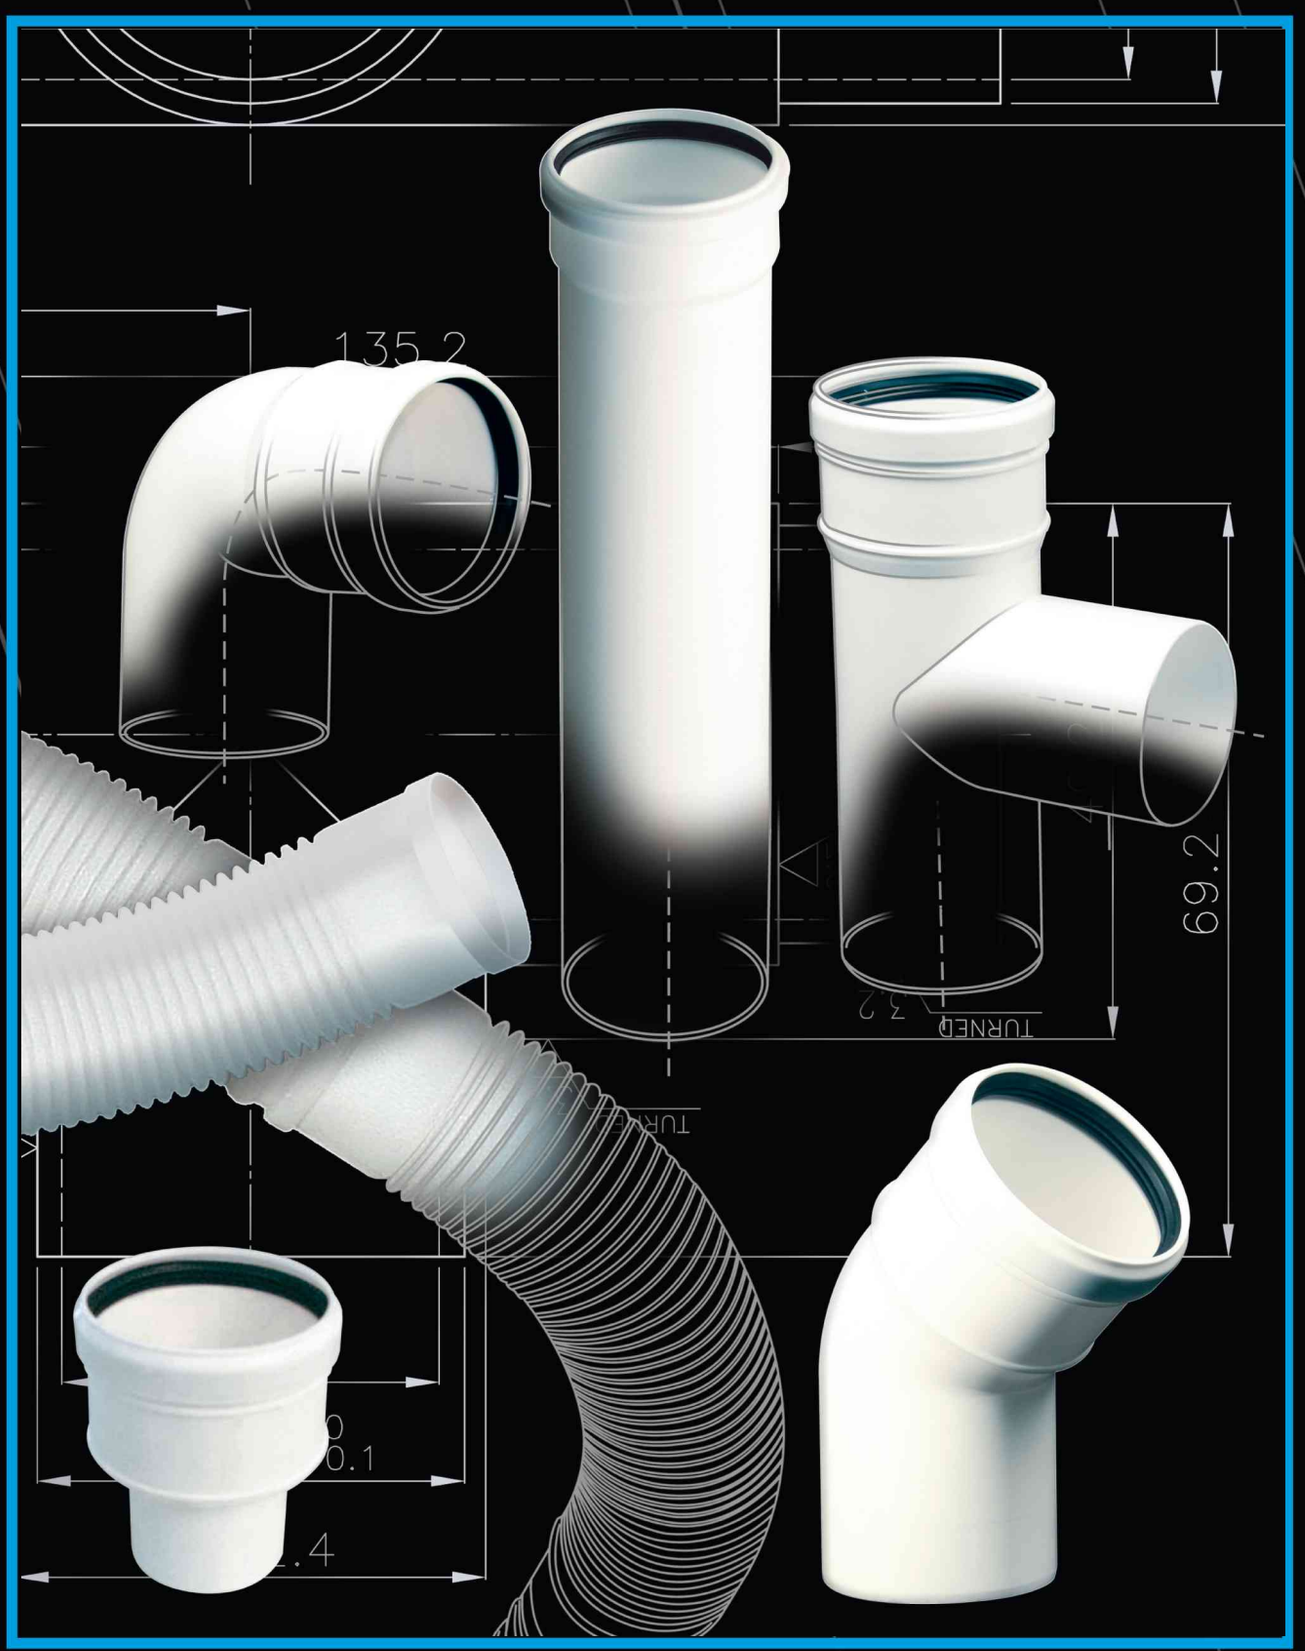

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

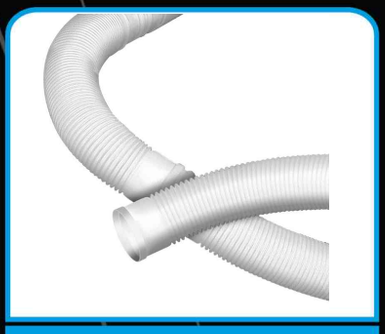

EXPL64A..

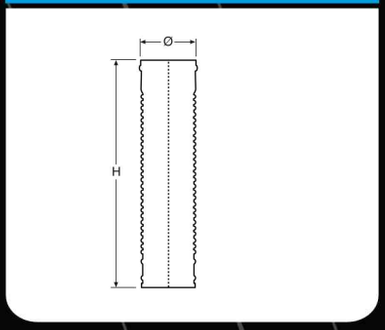

L316EXTA1S..

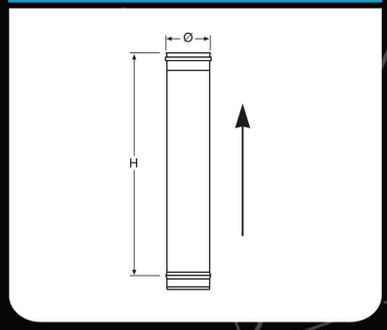

EXPL48A..

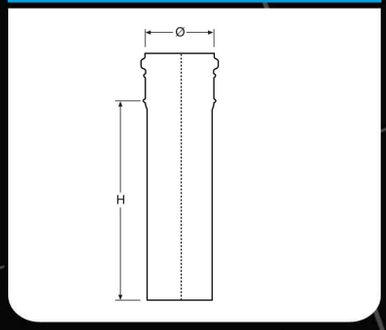

- Flexible en couronne PPs
- Longueur droite 1 m simple paroi
- Longueur droite 2 m PPs

Flexible pipe in coils single wall in polypropylene (PPs)

Ø	H_x003d_lungrotolo
60	50
80	50
100	25
125	25
160	25

Length 1 m single wall

Ø	H
80	940
100	940
110	940
120	940
125	940
130	940
140	940
150	940
160	940
180	940
200	940
220	940
250	940
300	940
350	940
400	940
450	940
500	940
550	940
600	940
650	940
700	940
750	940
800	940

Length 2 m single wall in polypropylene (PPs)

Ø	H
60	1930
80	1930
100	1930
125	1930
160	1930
200	1930

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

EXPL48B..



Longueur droite 1 m PPs

Length 1 m single wall in polypropylene (PPs)

Ø	H
60	930
80	930
100	930
125	930
160	930
200	930

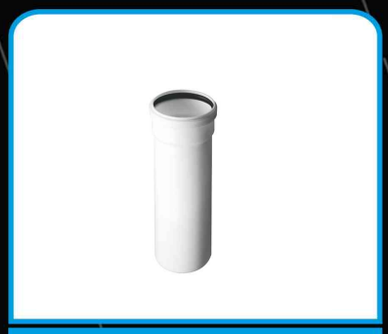

EXPL48C..



Longueur droite 0.50 m PPs

Length 0,5 m single wall in polypropylene (PPs)

Ø	H
60	430
80	430
100	430
125	430
160	430
200	430

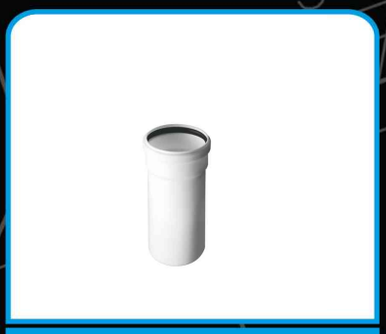

EXPL48D..



Longueur droite 0.25 m PPs

Length 0,25 m single wall in polypropylene (PPs)

Ø	H
60	180
80	180
100	180
125	180
160	180
200	180

PLAST'IN PPs

PLAST'IN PPs

EXPL49E..

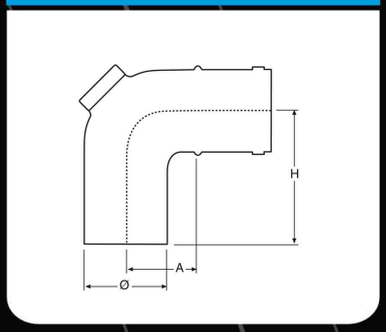

Coude 90° avec porte d'inspection PPs

Elbow 90° with inspection door single wall in polypropylene (PPs)

ø	H	A
60	103	100
80	113	110
100	136	120
125	147	160
160	170	160
200	200	185

EXPL49A..

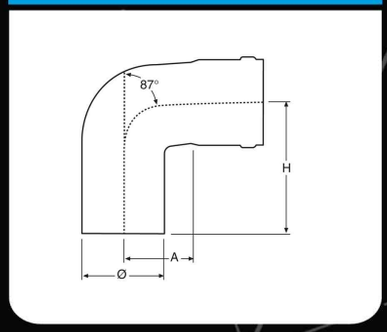

Coude 87° PPs

Elbow 87° single wall in polypropylene (PPs)

Ø	H	A
60	103	100
80	113	110
100	136	120
125	147	160
160	170	160
200	200	185

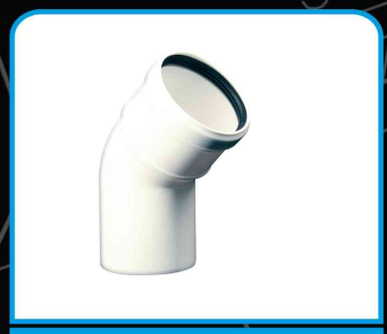

EXPL49B..

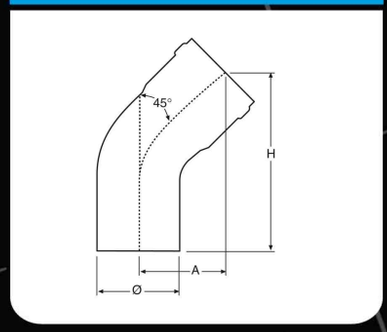

Coude 45° PPs

Elbow 45° single wall in polypropylene (PPs)

Ø	A	H
60	65	150
80	65	150
100	75	175
125	84	202
160	84	202
200	128	309

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

EXPL49C..



- Coude 30° PPs

Elbow 30° single wall in polypropylene (PPs)

Ø	H	A
60	125	38
80	125	38
100	146	45
125	187	59
160	187	59
200	157	59

EXPL53A..



- Elément de prélèvement des fumées PPs

Element for smoke test with threaded sleeve single wall in polypropylene (PPs)

Ø	H
60	180
80	180
100	180
125	180
160	180
200	180

EXPL52A..



- Elément d'évacuation des condensats PPs

Length with condense drain single wall in polypropylene (PPs)

Ø	H	A	B
60	180	60	138
80	180	60	138
100	180	60	138
125	180	60	138
160	180	60	138
200	180	60	138

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

EXPL55A..



Té 87° PPs

87° tee single wall in polypropylene (PPs)

Ø	H	A	B
60	180	240	100
80	180	325	110
100	265	325	120
125	265	325	132
160	265	325	150
200	306	366	170

EXPL77A..



Té à 87° piquage Ø 80 mm PPs

87° reducing tee to Ø 80 mm single wall in polypropylene (PPs)

ø	H	A	B
60	-	-	-
80	-	-	-
100	265	325	120
125	265	325	132
160	265	325	150
200	306	366	170

L316EXTAPSS..



Terminal anti-intempéries simple paroi

Anti downdraught cowl single wall in stainless steel

Ø	H	A
80	165	185
100	165	185
110	165	222
120	165	222
130	200	260
140	200	260
150	200	260
160	200	303
180	250	310
200	250	370
220	250	418
250	310	468
300	330	700
350	330	700
400	330	800
450	330	900
500	360	1000
550	360	1000
600	360	1000
650	360	1200
700	400	1250
750	400	1300
800	400	1400

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

EXPL77B..



- Té 87° piquage Ø 100 mm PPs

87° reducing tee to Ø 100 mm single wall in polypropylene (PPs)

ø	H	A	B
60	-	-	-
80	-	-	-
100	-	-	-
125	265	325	132
160	265	325	150
200	306	366	170

EXPL50A..



- Elément d'inspection PPs

Inspection length with round door single wall in polypropylene (PPs)

Ø	A	H
60	240	180
80	325	265
100	325	265
125	325	265
160	325	265
200	366	306

EXPL46A..



- Bride araignée pour flexible/rigide PPs

Centring bracket single wall in polypropylene (PPs)

Ø	A
60	170
80	170
100	170
125	170
160	170
200	170

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

EXPL70A..



Purge PPs

Tee cap with condense drain single wall in polypropylene (PPs)

Ø	H	A
60	64	30
80	64	30
100	64	30
125	64	30
160	64	30
200	64	30

L316EXFAPS2S..



Collet anti-intempéries

Storm collar

Ø	H
80	100
100	100
110	100
120	100
130	100
140	100
150	100
160	100
180	100
200	100
220	100
250	100
300	100
350	100
400	100
450	100
500	100
550	100
600	100
650	100
700	100
750	100
800	100

EXPL71A..



Tampon PPs

Tee cap single wall in polypropylene (PPs)

Ø	H	A
60	64	10
80	64	10
100	64	10
125	64	10
160	64	10
200	64	10

PLAST'IN PPs

PLAST'IN PPs

EXPL73A..



Purge pour siphon PPs

Tee cap with condense drain for siphon single wall in polypropylene (PPs)

Ø	A	H
80	40	60
100	40	60
125	40	60
160	40	60
200	40	60

ALUROSASI..



Rosace EPDM blanche

Internal wall plate in EPDM

Ø	-
60	-
80	-
100	-
125	-

EXPL45A..



Collier mural de fixation PPs

Wall bracket with anchor bolt

Ø	-
60	-
80	-
100	-
125	-
160	-
200	-

PLAST'IN PPs

EXPL85A..



Purge latérale pour départ sol ou collecteur PPs

Tee cap with lateral condense drain single wall in polypropylene (PPs)

Ø	H
60	60
80	60
100	60
125	60
160	60
200	60

EXPL98A..



Siphon pour purge PPs

Siphon single wall in polypropylene (PPs)

Ø	-
60	-
80	-
100	-

EXPL54A..



Coude 87° avec support PPs

Elbow 87° with fixing plate single wall in polypropylene (PPs)

Ø	H	A
60	43	100
80	53	110
100	76	120
125	87	160
160	100	160
200	130	185

PLAST'IN PPs

EXPL91060080



- Augmentation Mâle Femelle PPs

Increaser single wall in polypropylene (PPs)

ϕ1	ϕ2
60	80
80	100
100	125
125	160
160	200

L316EX3GN..



- Joint d'étanchéité en EPDM

Seal in EPDM black

Ø	H
80	10
100	10
125	10
160	10
180	10
200	10



BFL304AFPS5S..



- Solin incliné 5° à 30° avec base aluminium

Adjustable flashing from 5° to 30° with aluminium base

Øi	H	A	B
80	100	450	550
100	100	450	550
110	105	450	550
120	120	550	650
125	120	550	650
130	120	550	650
140	135	550	650
150	135	550	650
160	135	550	650
180	135	650	750
200	135	650	750
220	190	650	750
250	190	650	750
300	190	750	850
350	190	750	850

PLAST'IN PPs

PLAST'IN PPs

EXPO INOX

L316EXFACSS..



Bride de sécurité simple paroi

Locking band single wall in stainless steel

Ø	H
80	20
100	20
110	20
120	20
130	20
140	20
150	20
160	20
180	20
200	20
220	20
250	20
300	20
350	20
400	20
450	20
500	20
550	20
600	20
650	20
700	20
750	20
800	20

EXPL74A..



Terminal anti-intempéries avec plaque pour boisseau PPs

Anti downdraught cowl with top plate and with integrated chimney ventilation

Ø	A	B	C	H
80	200	200	490	240
100	250	250	490	240

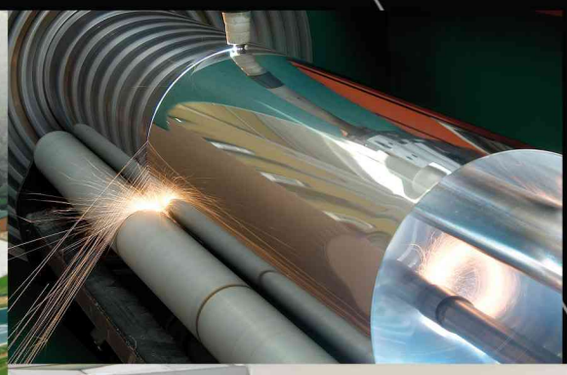

Expo Inox S.p.a.
Viale Artigianato 6
27020 Borgo San Siro (PV) ITALIA

tel. +39 0382 87237a
fax +39 0382 87330
e-mail: info@expoinox.com

www.expoinox.com